


American Grooved Y-Type Strainer



Certificate: UL Listed
Standard: UL Subject 321
Connection: Grooved as ISO 6182
Temperature: 0° C to 80° C
W. pressure: PN 16
Surface: FBE coating as AWWA C550

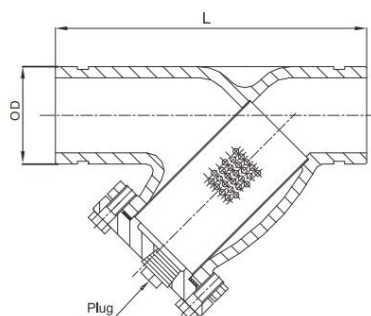

Specification

Part No	Part	Standard Specification	Options
1	Valve Body	ASTM A536, 65-45-12	
2	Screen	ASTM 304	AISI316
3	Rigid Coupling	ASTM A536, 65-45-12	
4	Cap	ASTM A536, 65-45-12	
5	Plug	Malleable Iron Galvanized	Bronze ASTM B584

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.

DN		Dimensions (mm)				
Inch	mm	L	OD	d	A	B
2"	50	247.5	60.3	57.15	15.88	7.92
2.5"	65	273	73	69.09	15.88	7.92
3"	80	298.5	88.9	84.94	15.88	7.92
4"	100	362	114.3	110.08	15.88	9.52
5"	125	419	141.3	137.03	15.88	9.52
6"	150	470	168.3	163.96	15.88	9.52
8"	200	609.5	219.1	214.4	19.05	11.13
10"	250	686	273	268.28	19.05	12.7
12"	300	762	323.9	318.29	19.05	12.7