


British Grooved Butterfly Valve



Certificate: CE
Standard: EN 593
Connection: Grooved as ISO 6182
Temperature: 0°C to 80°C
W. pressure: PN 16
Surface: FBE coating as AWWA C550

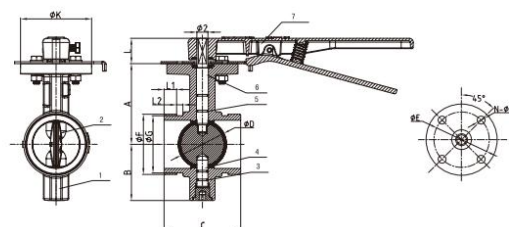

Specification

Part No	Part	Standard Specification	Options
1	Valve Body	EN-GJS-450-10	
2	Disc	EN-GJS-450-10+EPDM	EN-GJS-450-10+NBR
3	Q-Ring	NBR	EPDM
4	Stem	Stainless Steel	SS304, SS316, SS420, SS431
5	O-Rng	NBR	EPDM
6	Stem	Stainless Steel	SS304, SS316, SS420, SS431
7	Lever	EN-GJS-450-10	Aluminum
8	Signal Gearbox	EN-GJS-450-10	

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.

DN		Dimensions (mm)															
Inch	mm	L1	L2	L3	Φ B	Φ C	Φ D	H1	H2	H3	Φ 2	G	ISO5211	L4	Φ 3	L	D1
2"	603	88	159	79	572	60	50	50	110	32	14	9.5	F07	158	150	267	49
2.5"	76.1	90	159	79	723	76	61	60	122	32	14	9.5	F07	158	150	267	59
3"	889	96	159	79	84.9	89	76	65	122	32	14	9.5	F07	158	150	267	74
4"	114.3	115	159	95	110	114	99	82	145	32	16	11	F07	158	150	267	97
5"	139.7	125	159	9.5	136	140	123	95	155	32	16	11	F07	158	150	267	121
6"	165.1	132	159	95	161	165	148	110	175	32	20	13	F07	158	150	267	146
8"	219.1	147	19.1	11	214	219	199	150	200	45	26	21	F10	239	300	356	201