

British Threaded Butterfly Valve With Tamper SWitch



Certificate: UL Listed / FM Approved

Standard: EN 593 / BS 5155


Connection: Threaded as ISO 7-1

Contact rating: 16A at 125/250VAC; 0.5A at 250VDC; 10A at 36VDC

Temperature: 0° C to 80° C

W. pressure: PN 10

Surface: FBE coating as AWWA C550

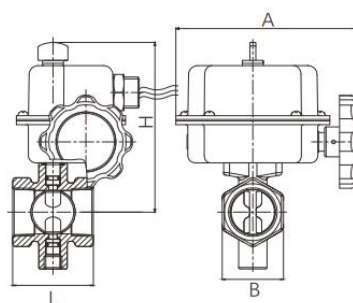

Specification

Part No	Part	Standard Specification	Options
1	Valve Body	EN-GJS-450-10	
2	Screw	Carbon Steel Zinc Plated	SS304, SS316
3	Stem	Stainless Steel	SS304, SS316, SS420, SS431
4	O-Ring	NBR	EPDM
5	Disc	Carbon Steel EPDM	Carbon Steel+NBR
6	Stem	Stainless Steel	SS304, SS316, SS420, SS431
7	O-Ring	NBR	EPDM
8	O-Ring	NBR	EPDM
9	Signal Gearbox	Carbon Steel	

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.

DN		Dimensions (mm)					
Inch	mm	L	H	H1	A	B	C (Rc)
1"	25	54	115	33	125	41	1
1.25"	32	67	117.5	37	125	49	1 1/4
1.5"	40	73	121	40.5	125	55.5	1 1/2
2	50	82.5	131	48	125	71	2