


## Angle Hose Valve F&M

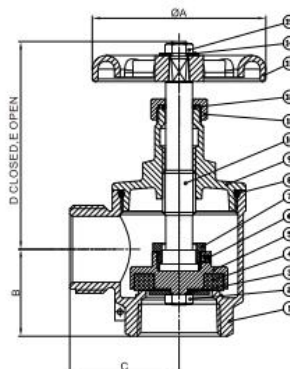

### Specification

300lb.RATED

Used with a Fire Hose Rack Assembly Or as a Fire Dept.outlet connection FEMALE x MALE

Standard equipment:

Female NPT inlet x male hose thread Outlet forge brass valve Red hand wheel.

Optional Finishes:

PB-Polished Brass

RC-Rough Chrome Plated

PC-Polished Chrome Plated

| NO | DESCRIPTION | MATERIALS           | NO | DESCRIPTION  | MATERIALS           |
|----|-------------|---------------------|----|--------------|---------------------|
| 1  | BODY        | ASTM B283<br>C37700 | 9  | BONNET       | ASTM B283<br>C37700 |
| 2  | NUT         | ASTM B283<br>C37700 | 10 | STEM         | ASTM B283<br>C37700 |
| 3  | WASHER      | 304                 | 11 | LOCK NUT     | ASTM B283<br>C37700 |
| 4  | SEAT SEAL   | EPDM(A70)           | 12 | O-RING       | EPDM(A70)           |
| 5  | HOLDER      | ASTM B283<br>C37700 | 13 | HANDLE WHEEL | ZL102               |
| 6  | SET SCREW   | 304                 | 14 | WHEEL WASHER | 304                 |
| 7  | LOCK NUT    | ASTM B283<br>C37700 | 15 | WHEEL NUT    | ASTM B283<br>C37700 |
| 8  | O-RING      | EPDM(A70)           |    |              |                     |

| Inch          | A   | B  | C  | D   | E   |
|---------------|-----|----|----|-----|-----|
| 1 1/2"X1 1/2" | 100 | 50 | 63 | 119 | 145 |
| 2 1/2"×2 1/2" | 127 | 68 | 79 | 157 | 200 |

