


Angle Hose Valve F&F

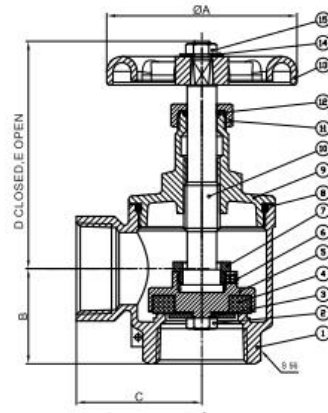

Specification

300lb.RATED

Used with a Fire Hose Rack Assembly Or as a Fire Dept.outlet connection DOUBLE FEMALE

Standard equipment:

Female NPT inlet and outlet forge brass valve Red hand wheel.

Optional Finishes:

PB-Polished Brass

RC-Rough Chrome Plated

PC-Polished Chrome Plated

NO	DESCRIPTION	MATERIALS	NO	DESCRIPTION	MATERIALS
1	BODY	ASTM B283 C37700	9	BONNET	ASTM B283 C37700
2	NUT	ASTM B283 C37700	10	STEM	ASTM B283 C37700
3	WASHER	304	11	LOCK NUT	ASTM B283 C37700
4	SEAT SEAL	EPDM (A70)	12	O-RING	EPDM (A70)
5	HOLDER	ASTM B283 C37700	13	HANDLE WHEEL	ZL102
6	SET SCREW	304	14	WHEEL WASHER	304
7	LOCK NUT	ASTM B283 C37700	15	WHEEL NUT	ASTM B283 C37700
8	O-RING	EPDM (A70)			

Inch	A	B	C	D	E
1 1/2"X1 1/2"	100	50	63	119	145
2 1/2"×2 1/2"	127	68	79	157	200

