


Test And Drain Valve

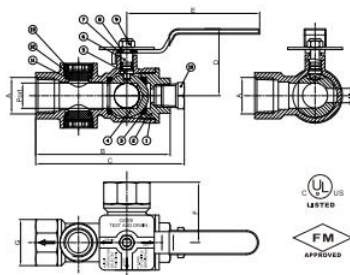

Specification

A	Orifice	Port	B	C	D	E	F	G
NPT 1"	1/2" (0.512)	0.906"	4.82"	5.32"	2.4"	4.76"	2.165"	1.653"
NPT 1 1/4"	1/2" (0.512)	1.181"	5.26"	5.75"	4.5"	5.55"	2.362"	2.007"
NPT 2"	1/2" (0.512)	1.85"	6.02"	6.54"	3.43"	6.34"	2.835"	2.756"


HC-125-ANG

Positive positioning of handle for OFF, TEST, or DRAIN

Only 2 threaded connections Large, integral sight glass on both sides

X" (nominal) test orifice, UL listed and FM approval

NO	PART	MATERIALS	NO	PART	MATERIALS
1	BODY	C37700	8	INDICATOR PLATE	SST304
2	BODY CAP	C37700	9	NUT	SST304
3	SEAT	PTFE	10	CAP PLUG	C37700
4	BALL	C37700	11	WASHER	NBR
5	STEM	C37700	12	SIGHT GLASS	LEXAN
6	O-RING	NBR	13	RETAINING RING	C37700
7	LEVER	SST304			

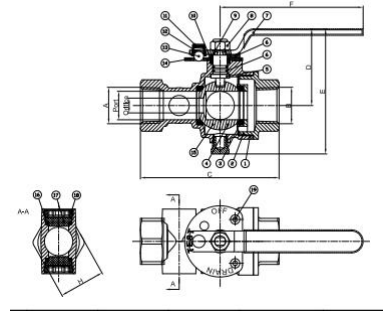

Specification

HC-125-STR

Positive positioning of handle for OFF, TEST, or DRAIN

Only 2 threaded connections Large, integral sight glass on both sides

h" (nominal) test orifice

A/B (Orifice)	Orifice	Port	A	B	C	D	H
1"	1/2"	1.024"	5"	2.76"	5.16"	4.5"	1.65"
1-1/4"	1/2"	1.024"	5"	2.76"	5.16"	4.5"	1.65"
2"	1/2"	1.575"	6.57"	3.5"	6.34"	5.8"	2.28"

NO	PART	MATERIALS	NO	PART	MATERIALS
1	BODY	C37700	11	CAP	C37700
2	BODY CAP	C37700	12	SPRING	SST304
3	SEAT	PTFE	13	STEEL BALL	SST304
4	BALL	C37700	14	INDICATOR PLATE	STEEL
5	STEM	C37700	15	PLUG	C37700
6	O-RING	NBR	16	WASHER	NBR
7	LEVER	STEEL	17	SIGHT GLASS	LEXAN
8	NUT	STEEL	18	RETAINING RING	C37700
9	GLAND PACKING	PTFE	19	STOP SCREW	SST304
10	GLAND	C37700			