



British Flanged Y-Type Strainer

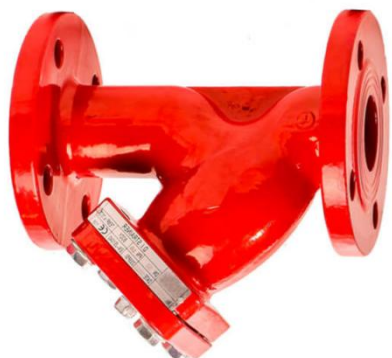

Certificate: UL Listed
Standard: UL Subject 321
Connection: Flanged as EN 1092-2
Temperature: 0° C to 80° C
W. pressure: PN 16
Surface: FBE coating as AWWA C550



Specification

Part No.	Par	Standard Specificalon	Options
1	Valve Body	EN-GJS-450-10	
2	Screen	SS304 (Perforated)	SS304, SS316 (Perforated, Knitted, Double Screen)
3	Gasket	Graphite+Acanthopore Plate	EPDM
4	Bonnet	EN-GJS-450-10	
5	Plug	Malleable Iron Galvanized	Bronze ASTM B584
6	Bolt	Carbon Steel Zinc Plated	SS304, SS316
7	Flat Washer	Carbon Steel Zinc Plated	SS304, SS316

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.

DN		PN	Dimensions (mm)							
inch	mm		L	D	D1	D2	b	n- ϕ d	f	H
2"	50	45581	230	165	125	99	19	4- ϕ 19	3	140
2.5"	65	45581	290	185	145	118	19	4- ϕ 19	3	175
3"	80	45581	310	200	160	132	19	8- ϕ 19	3	198
4"	100	45581	350	220	180	156	19	8- ϕ 19	3	229
5"	125	45581	400	250	210	184	19	8- ϕ 19	3	287
6"	150	45581	480	285	240	211	19	8- ϕ 23	3	304
8"	200	10	490	340	295	266	20	8- ϕ 23	3	370.5
	200	16						12- ϕ 23		
10"	250	10	730	405	350	319	22	12- ϕ 2	3	469
		16			355			12- ϕ 28		
12"	300	10	850	460	400	370	24.5	12- ϕ 23	4	540
		16			410			12- ϕ 28		
18"	450	10	1200	640	565	530	30	20- ϕ 28	4	862
		16			585	548		20- ϕ 31		
20"	500	10	1250	715	620	582	315	20- ϕ 28	4	926
		16			650	609		20- ϕ 34		
24"	600	10	1450	840	725	682	36	20- ϕ 31	5	1057
		16			770	720		20- ϕ 37		