


British Grooved Y-Type Strainer



Certificate: UL Listed
Standard: UL Subject 321
Connection: Grooved as ISO 6182
Temperature: 0° C to 80° C
W. pressure: PN 16
Surface: FBE coating as AWWA C550

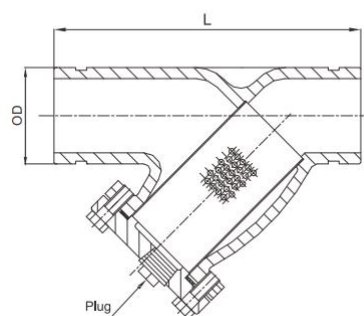

Specification

Part No	Part	Standard Specification	Options
1	Valve Body	EN-GJS450-10	
2	Screen	SS304	SS316
3	Rigid Coupling	EN-GS-450-10	
4	Cap	EN-GJS450-10	
5	Plug	Malleable Iron Galvanized	Bronze ASTM B584

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.

DN		Dimensions (mm)				
inch	mm	L	OD	d	A	B
2	50	2475	603	57.15	5.88	7.92
2.5"	65	273	73	69.09	5.88	7.92
2.5"	65	2730	76.1	7226	588	7.92
3"	80	298.5	889	84.94	5.88	7.92
4"	100	3620	1143	110.08	588	9.52
5"	125	4190	39.7	35.48	5.88	9.52
5"	25	419	413	37.03	5.88	9.52
6"	150	4700	590	154.50	5.88	9.52
6"	150	470.0	65.1	160.90	588	9.52
6"	150	470.0	1683	63.96	5.88	9.52
8"	200	609.5	219.1	214.40	9.05	11.13
10"	250	686.0	2730	268.28	9.05	12.70
12"	300	7620	3239	318.29	19.05	1270