


Grooved Butterfly Valve

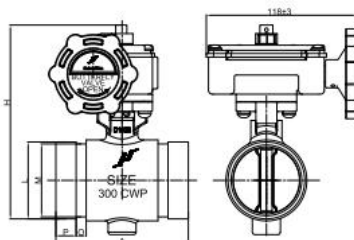

Specification

HC-145

FIRE PROTECTION SLOW-CLOSEGROOVED BUTTERFLY VALVE

BODY:C83600 &C87800

WORKING PRESSURE:300 CWP,STAINLESS DISC FULL PORT

SIEZ:1-1/4"~2-1/2"ULlist and FM approval

LPBG (Grooved Ends)					
SIZE	1"	1-1/4"	1-1/2"	2"	2-1/2"
A		98	102	104	114
H		133	140	153	167.5
P		15.88	15.88	15.88	15.88
O		7.95	7.95	7.95	7.95
M		38.99	45.09	57.15	69.09
L		42.16	48.26	60.33	73.03

MATERIAL LIST		
	NAME	MATERIAL
1	BODY	C83600/C87800
2	SPLINT	304
3	CORE	EPDM
4	HANDWHEEL	HT200/LV
5	GEAR EAR BOX	HPb57-3
6	COVER	HPb57-3
7	INDICATOR	Q235A