

Vertical Indicator Post




• Statement:

Vertical indicator post provides a means to operate a buried or otherwise inaccessible valve and able to indicate the open or shut position of the valve.

• Coating:

Fusion Bonded Epoxy Coating in accordance with ANSI/AWWA C550

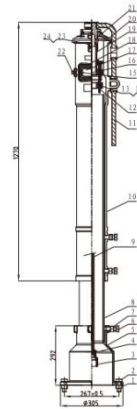

Specification

Part No	Part	Standard Specification
1	Hex NUT	Carbon Steel Znc Plated
2	Hex Bolt	Carbon Steel Znc Plated
3	Socket	ASTMA536, 65-45-12
4	Cotter Pin	SS304
5	Base Flange	ASTMA536, 65-45-12
6	Hex Bolt	Carbon Steel Zinc Plated
7	Hex Nut	Carbon Steel Zinc Plated
8	Standpipe	Carbon Steel ASTM A53
9	Stem 1"Square	Carbo Steel AISI 1045
10	Body	ASTMA536, 65-45-12
11	Locking Wrench	ASTMA536, 65-45-12
12	Target Camier Nut	SS304 (SIZE:100-400) Brass HPb59-1 (SIZE:450-600)
13	Hex Bolt	Carbon Steel Zinc Plated
14	Hex Nut	Carbon Steel Zinc Plated
15	Hex Bolt	Carbon Steel Zinc Plated
16	instructs the plate	ASTMA536, 65-45-12
17	Window Class	Plexiglass
18	Gasket	EPDM
19	Operafing NUT	SS304
20	Top Section	ASTMA536, 65-45-12
21	Snap Ring	Stainless Steel AISI1066
22	Plug	Maleable iron Galvanized

23	Square Nut	Carbon Steel Zinc Plated
24	Hex Bolt	Carbon Steel Zinc Plated

Field Adjustment:

- 1.Remove the Top Section from the top of the Indicator Post assembly;
- 2.Cut the required stem length and adjust the Standpipe to match up to the ground line;
- 3.Set the "OPEN" and "SHUT" targets for the appropriate valve size;
- 4.Reattach the Top Section to the top of the Indicator Post assembly