


CLEVIS HANGER-K07、K04

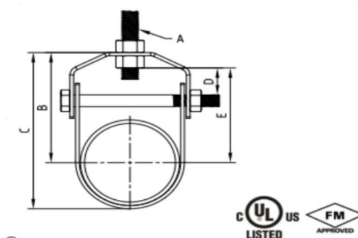

Function: Designed for the suspension of stationary pipe.

Material: Carbon steel

Finish: Electro-galvanized

Approvals: Underwriters' Laboratories Listed in the U.S.(UL),Canada (CUL), for use with standard steel pipe sizes 1/2" to 12".Factory Mutual Approved for steel pipe sizes 3/4" to 12".Complies with Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69.

Maximum Temperature: 343°C (650°F)

Ordering: Specify size

Item	Size	Specification of bolts and Size		A		B	C	D	E	Max.Rec.Load		
		m m	in	mm	m m	mm	mm	mm	mm	Lbs	Kg	N
GSU9	1/2"	M6	1/4"-20UNC	M10	3/8"-16UNC	38.1	51	5.41	27.51	299	135	1334
GSU9	3/4"	M6	1/4"-20UNC	M10	3/8"-16UNC	47.4	63	7.41	36.81	299	135	1334
GSU9	1"	M6	1/4"-20UNC	M10	3/8"-16UNC	51.05	70	9.41	40.46	299	135	1334
GSU9	1-1/4"	M6	1/4"-20UNC	M10	3/8"-16UNC	66.65	90	17.41	56.06	299	135	1334
GSU9	1-1/2"	M6	1/4"-20UNC	M10	3/8"-16UNC	69.1	95.5	20.91	58.51	299	135	1334
GSU9	2"	M6	1/4"-20UNC	M10	3/8"-16UNC	77.1	109.5	22.91	66.51	299	135	1334
GSU9	2-1/2"	M10	3/8"-16UNC	M12	1/2"-13UNC	93.8	133	22.19	79.99	339	153	1512
GSU9	3"	M10	3/8"-16UNC	M12	1/2"-13UNC	104.85	152	27.19	91.04	419	189	1868
GSU9	3-1/2"	M10	3/8"-16UNC	M12	1/2"-13UNC	114.6	169	29.29	99.89	499	225	2224
GSU9	4"	M10	3/8"-16UNC	M16	5/8"-11UNC	130.75	191.5	34.95	112.2	599	270	2668
GSU9	5"	M12	1/2"-13UNC	M16	5/8"-11UNC	161.75	236.5	46.95	143.2	799	360	3558
GSU9	6"	M12	1/2"-13UNC	M18	3/4"-10UNC	181.35	270	43.22	159.57	1059	477	4714
GSU9	8"	M16	5/8"-11UNC	M22	7/8"-9UNC	216.95	331	47.46	192.41	1619	729	7205
GSU9	10"	M18	3/4"-10UNC	M22	7/8"-9UNC	258.6	400.5	51.56	230.66	2339	1053	10408
GSU9	12"	M18	3/4"-10UNC	M22	7/8"-9UNC	287.15	454.5	55.56	259.21	3159	1422	14055