


Angle Pad Coupling



- Certificate: FM Approved / UL Listed
- Size: 1" - 12" (DN 25 - DN 300)
- Pressure: 300PSI
- Dimensions: ANSI B16.3
- Material: ASTM A536, GRADE 65-45-12, QT450-10
- Threaded: ASME B1.20.1, ISO 7-1, GB 7306
- Surface: P: Painted E: Electroplated B: Black S: Epoxy G: Hot-dip Galvanized

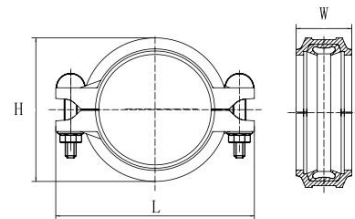

Available size

SIZE		OD SIZE	L (MM)	H (MM)	W (MM)
1"	DN25	33.7	97	58	45.5
1 1/4"	DN32	42.4	104	66	45.5
1 1/2"	DN40	48.3	114	72	45.5
2"	DN50	60.3	128	85	45.5
2 1/2"	DN65	73.0	137	94	45.5
2 1/2"	DN65	76.1	142	98	45.5
3"	DN80	88.9	164	112	46
4"	DN100	108.0	187	134	50
4"	DN100	114.3	190	138	50
5"	DN125	133.0	212	160	50
5"	DN125	139.7	223	168	50
5"	DN125	141.3	226	170	50
6"	DN150	159.0	244	188	50
6"	DN150	165.1	247	194	50
6"	DN150	168.3	250	196	50
8"	DN200	219.1	320	254	60
10"	DN250	273.0	408	316	65
12"	DN300	323.9	460	372	65