


Malleable Iron Reducing Cross



- Certificate: FM Approved / UL Listed / BSI / LPCB / NSF 61
- Size: DN20×15 - DN100×80
- Pressure: 2.5 Mpa / PN25
- Dimensions: BS EN10242
- Material: Malleable iron BS EN1562
- Threaded: BSPP (ISO228) / BSPT (ISO7-1)
- Surface: Black / Electrical galvanized / Hot-dip galvanized

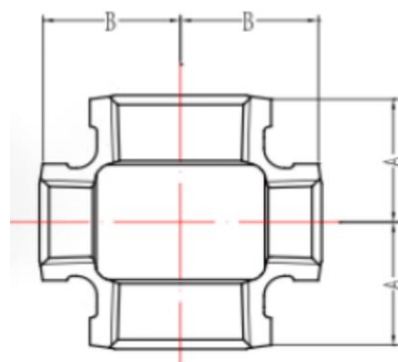

Available size

SIZE		A (MM)	B (MM)	PCS/CTN.
3/4 "x1/2"	20×15	29	30	120
1"x1/2"	25×15	31	33	96
1 "x 3/4"	25×20	34	35	80
1-1/4"x1/2"	32×15	34	37	64
1-1/4"x3/4"	32×20	36	40	60
1-1/4"x1"	32×25	40	41	56
1-1/2"x1/2"	40×15	35	41	52
1-1/2"x3/4"	40×20	37	43	52
1-1/2"x1"	40×25	41	45	42
1-1/2"x1-1/4"	40×32	45	47	34
2 "x1/2"	50×15	37	47	36
2 "x3/4"	50×20	40	49	36
2 "x 1"	50×25	43	51	28
2 "x1-1/4"	50×32	47	53	28
2"x1-1/2"	50×40	51	54	20
2-1/2"x1/2"	65×15	40.5	56	20
2-1/2"x3/4"	65×20	43.5	57	20

2-1/2"x1"	65×25	47.5	59	18
2-1/2"x1-1/4"	65×32	51.5	61	16
2-1/2"x 1-1/2"	65×40	54.5	61	14
2-1/2"x2"	65×50	59.5	64	10
3 "x1/2"	80×15	42.5	64	12
3 "x3/4"	80×20	45.5	65	12
3 "x 1"	80×25	49.5	67	12
3 "x1-1/4"	80×32	54.5	69	12
3 "x 1-1/2"	80×40	57.5	71	10
3 "x 2"	80×50	61.5	71	10
3 "x2-1/2"	80×65	71.5	74	8
4"x1/2"	100×15	49.5	78	6
4 "x3/4"	100×20	53.5	79	6
4 "x 1"	100×25	56.5	82	6
4 "x1-1/4"	100×32	60.5	85	6
4 "x1-1/2"	100×40	62.5	85	4
4 "x2"	100×50	68.5	86	4
4"x2-1/2"	100×65	77.5	89	4
4 "x 3"	100×80	82.5	90	4