


Malleable iron Reducing Socket



- Certificate: FM Approved / UL Listed / BSI / LPCB / NSF 61
- Size: DN10×8 - DN150×80
- Pressure: 2.5 Mpa / PN25
- Dimensions: BS EN10242
- Material: Malleable iron BS EN1562
- Threaded: BSPP (ISO228) / BSPT (ISO7-1)
- Surface: Black / Electrical galvanized / Hot-dip galvanized

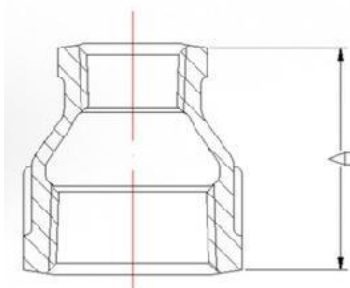

Available size

SIZE	A (MM)		PCS/CTN.
3/8"x1/4"	10×8	29	500
1/2"x1/4"	15×8	35	500
1/2"x3/8"	15×10	36	500
3/4 "x1/4"	20×8	38	360
3/4 "x 3/8"	20×10	38	360
3/4 "x 1/2"	20×15	38	360
1"x1/4"	25×8	44	200
1"x3/8"	25×10	44	200
1"x1/2"	25×15	44	200
1 "x 3/4"	25×20	44	200
1-1/4"x1/2"	32×15	49	144
1-1/4"x3/4"	32×20	49	144
1-1/4"x1"	32×25	49	120
1-1/2"x1/2"	40×15	53	140
1-1/2"x3/4"	40×20	53	140
1-1/2"x1"	40×25	53	120
1-1/2"x 1-1/4"	40×32	53	100
2 "x1/2"	50×15	63	80
2 "x3/4"	50×20	63	80
2 "x 1"	50×25	63	72
2 "x1-1/4"	50×32	63	72
2"x1-1/2"	50×40	63	48
2-1/2"x1/2"	65×15	72	60
2-1/2"x3/4"	65×20	72	60
2-1/2"x1"	65×25	72	60

2-1/2"x1-1/4"	65×32	72	60
2-1/2"x 1-1/2"	65×40	72	60
2-1/2"x2"	65×50	72	40
3 "x1/2"	80×15	77.5	40
3 "x3/4"	80×20	77.5	40
3 "x 1"	80×25	77.5	40
3 "x1-1/4"	80×32	77.5	40
3 "x 1-1/2"	80×40	77.5	40
3 "x 2"	80×50	77.5	36
3 "x2-1/2"	80×65	77.5	24
4 "x1/2"	100×15	91.5	20
4 "x3/4"	100×20	91.5	20
4 "x 1"	100×25	91.5	20
4"x 1-1/4"	100×32	91.5	20
4 "x1-1/2"	100×40	91.5	20
4 "x 2"	100×50	91.5	16
4"x2-1/2"	100×65	91.5	14
4 "x 3"	100×80	91.5	12
6"x4"	150×80	118	/