


## Socket Weld (SW) Cap



- Certificate: ISO
- Standard: ASME B16.11
- Material : Carbon steel ASTM A 105 / Stainless steel
- Type: Forged fitting
- W. pressure: Class 3000 / 6000 / 9000
- Surface: Original / hot dip galvanized

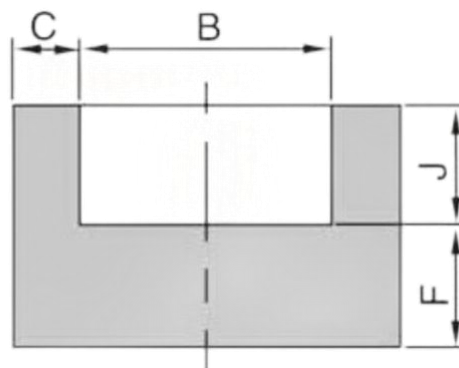

### Available size

| SIZE   |     | Socket Bore<br>Dia.<br><b>B</b> | Socket Wall<br><b>C min</b> |         |         | Depth of<br>socket<br><b>J min</b> | Laying<br>Length<br><b>F</b> |
|--------|-----|---------------------------------|-----------------------------|---------|---------|------------------------------------|------------------------------|
| NPS    | DN  |                                 | 3000 LB                     | 6000 LB | 9000 LB |                                    |                              |
| 1/8"   | 6   | 10.9                            | 3.18                        | 3.43    | -       | 9.5                                | 16.0                         |
| 1/4"   | 8   | 14.3                            | 3.30                        | 4.01    | -       | 9.5                                | 16.0                         |
| 3/8"   | 10  | 17.7                            | 3.50                        | 4.37    | -       | 9.5                                | 17.5                         |
| 1/2"   | 15  | 21.9                            | 4.09                        | 5.18    | 8.18    | 9.5                                | 22.5                         |
| 3/4"   | 20  | 27.3                            | 4.27                        | 6.04    | 8.56    | 12.5                               | 24.0                         |
| 1"     | 25  | 34.0                            | 4.98                        | 6.93    | 9.96    | 12.5                               | 28.5                         |
| 1-1/4" | 32  | 42.8                            | 5.28                        | 6.93    | 10.62   | 12.5                               | 30.0                         |
| 1-1/2" | 40  | 48.9                            | 5.54                        | 7.80    | 11.12   | 12.5                               | 32.0                         |
| 2"     | 50  | 61.2                            | 6.04                        | 9.50    | 12.12   | 16.0                               | 41.0                         |
| 2-1/2" | 65  | 73.9                            | 7.62                        | -       | -       | 16.0                               | 43.0                         |
| 3"     | 80  | 89.9                            | 8.30                        | -       | -       | 16.0                               | 44.5                         |
| 4"     | 100 | 115.5                           | 9.35                        | -       | -       | 16.0                               | 48.5                         |